




A PROBE

ASSEMBLY DESCRIPTION

The A Probe is a wireline manipulated device that is used to retract the four locking dogs on a B & T S Lock in order to remove it from a B & T S Landing Nipple.

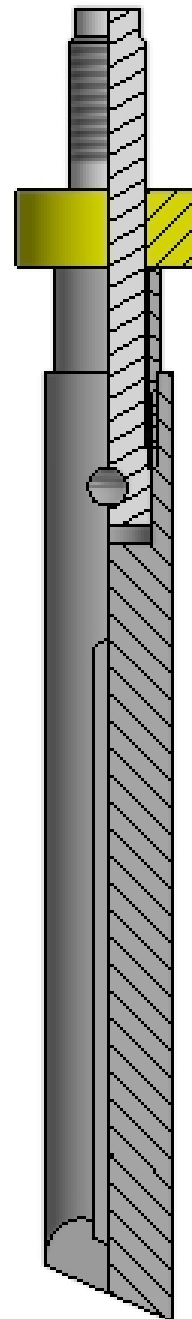



A PROBE

SPECIFICATIONS			
	1.500	2.000	2.500
Maximum O.D.	0.724	0.832	1.137
Pin Connection	3/8"-16	1/2"-13	1/2"-13
Bottom Connection	7/16"-14	1/2"-13	1/2"-13
Length	7.469	9.063	9.063

SPECIFICATIONS			
	3.000	4.500	
Maximum O.D.	1.387	2.031	
Pin Connection	5/8"-11	1-1/4"-12	
Bottom Connection	5/8"-11	5/8"-11	
Length	10.656	12.438	

All Specification Tables contain approximated dimensions and should be used for reference only.