




ANTI-BLOW UP TOOL

ASSEMBLY DESCRIPTION

The Anti-Blow Up Tool is installed in the tool string above the B.H.P. equipment. The weight of the B.H.P. equipment will keep the dogs retracted.

If a sudden surge of pressure were to occur below the tool string, the memory pressure gauges and other equipment would move upward, releasing the Dogs outward. The Dogs would then engage the inner tubing wall, thereby preventing the tool string from being blown up the tubing.

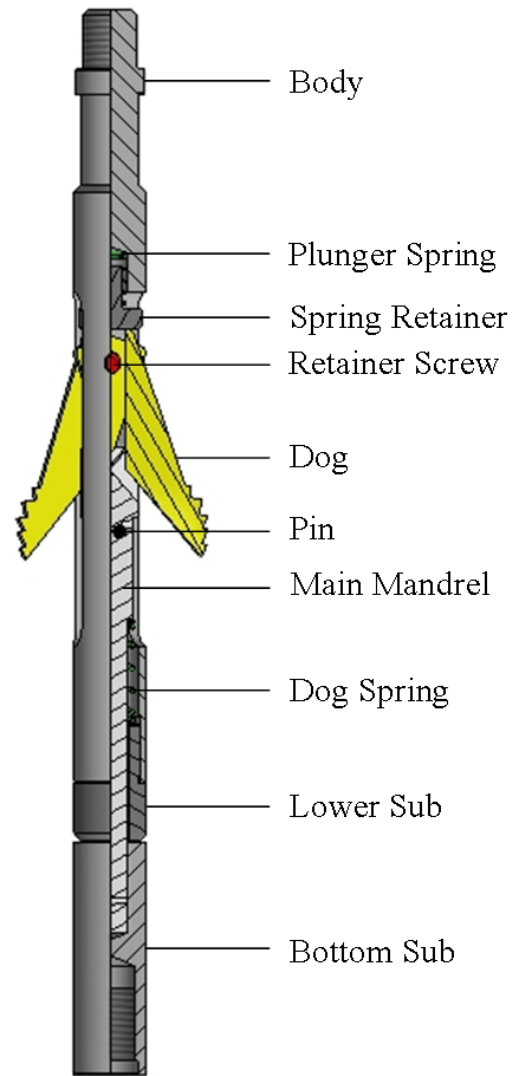



ANTI-BLOW UP TOOL

SPECIFICATIONS		
	1.250	1.500
Fishneck	1.187	1.375
Connections	15/16"-10	15/16"-10

All Specification Tables contain approximated dimensions and should be used for reference only.