




DRIVE-DOWN BAILER

ASSEMBLY DESCRIPTION

Drive-Down Bailers are simple tools consisting of a Top Sub, Barrel, and either a Ball Bottom or Flapper Bottom. They are used to bail mud and shale by being lowered into the shale, or debris. This fills the Barrel with the target debris. The Drive-Down Bailer is then pulled to extract the debris out of the well bore.

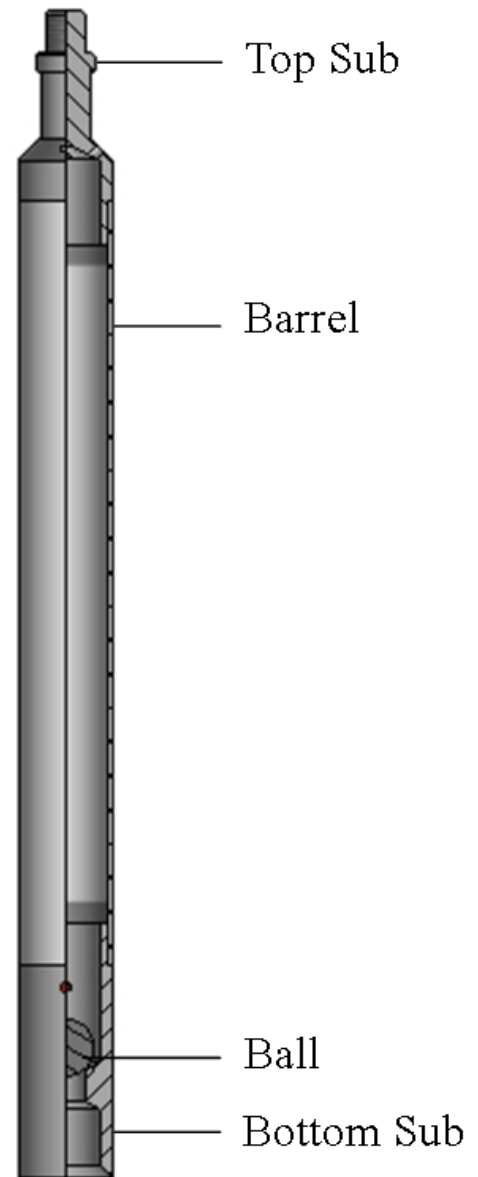



DRIVE-DOWN BAILER

SPECIFICATIONS				
	1.000	1.250	1.500	1.625
Fishneck	1.000	1.188	1.375	1.375
Connection	5/8"-11	15/16"-10	15/16"-10	15/16"-10

SPECIFICATIONS				
	1.750	2.000	2.250	2.500
Fishneck	1.750	1.750	1.750	1.750
Connection	1-1/16"-10	1-1/16"-10	1-1/16"-10	1-1/16"-10

All Specification Tables contain approximated dimensions and should be used for reference only.