




FSB BOMB HANGER

ASSEMBLY DESCRIPTION

The FSB Bomb Hanger performs the same functions as the FWB Bomb Hanger, utilizing a B & T S Lock.

A B & T S Pulling Tool or a JD Pulling Tool can be used to pull and set the FSB Bomb Hanger.

A B & T C-1 Running Tool or a JD Pulling Tool can be used to run and set the tool.

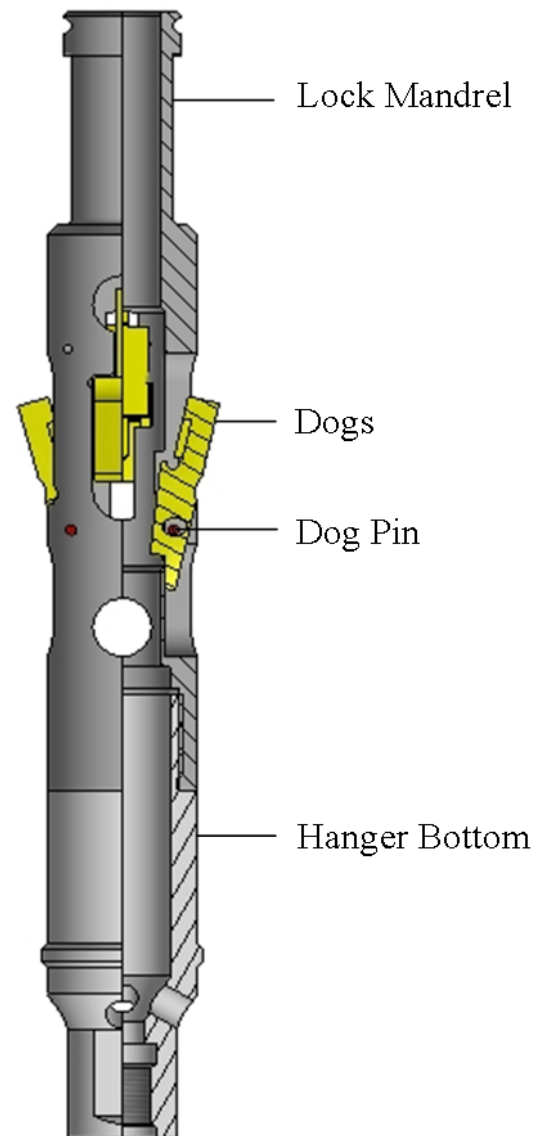



FSB BOMB HANGER

SPECIFICATIONS				
	1.780	1.810	1.875	2.250
Fishneck	1.375	1.375	1.375	1.750
Maximum O.D.	1.771	1.802	1.865	2.240
Length	13.136	13.136	13.136	14.207
Running Tool	C1RT-02000-01	C1RT-02000-01	C1RT-02000-01	C1RT-02500-01
Pulling Tool	SBPT-02000-01 JDCBT-02000-01	SBPT-02000-01 JDCBT-02000-01	SBPT-02000-01 JDCBT-02000-01	SBPT-02500-01 JDCBT-02500-01

SPECIFICATIONS				
	2.310	2.750	2.810	
Fishneck	1.750	2.313	2.313	
Maximum O.D.	2.302	2.740	2.802	
Length	14.207	14.627	14.627	
Running Tool	C1RT-02500-01	C1RT-03000-01	C1RT-03000-01	
Pulling Tool	SBPT-02500-01 JDCBT-02500-01	SBPT-03000-01 JDCBT-03000-01	SBPT-03000-01 JDCBT-03000-01	

All Specification Tables contain approximated dimensions and should be used for reference only.