




FSG BLANKING PLUG

ASSEMBLY DESCRIPTION

The FSG Blanking Plug allows fluid to by-pass through the side ports when running in the well. It contains 2 sets of Dogs, one set in the upward position, and one set in the downward position, to lock in place against pressure.

A B & T S Pulling Tool or a JD Pulling Tool can be used to pull and set the FSG Blanking Plug.

A B & T C-1 Running Tool or a JD Pulling Tool can be used to run and set the tool.

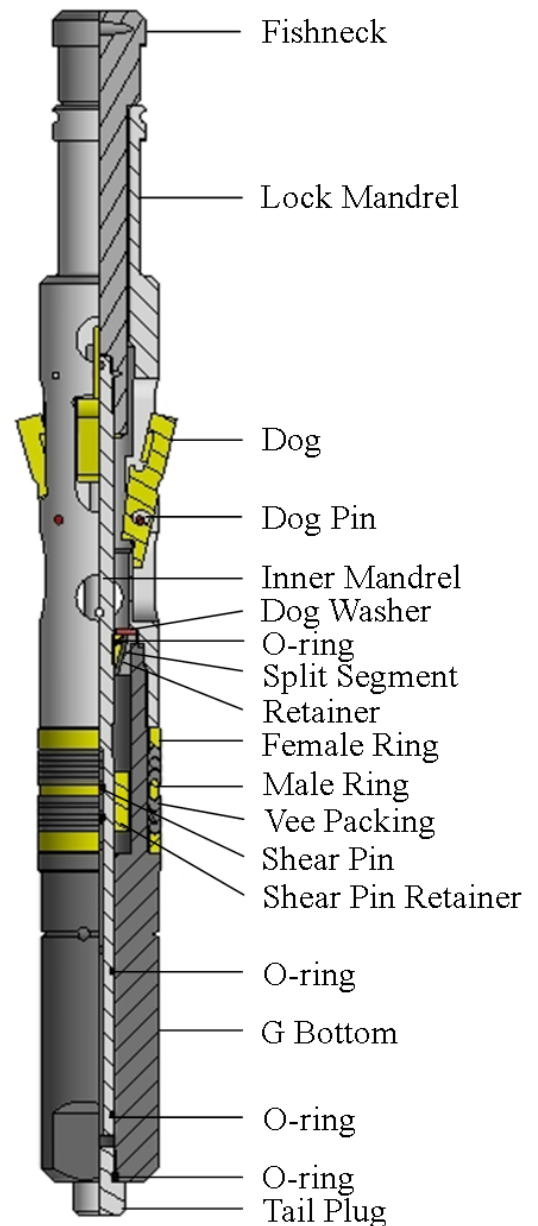



FSG BLANKING PLUG

| SPECIFICATIONS | | | | |
|----------------|---------------|---------------|---------------|---------------|
| | 1.500 | 1.780 | 1.810 | 1.870 |
| Fishneck | 1.188 | 1.375 | 1.375 | 1.375 |
| Maximum O.D. | 1.490 | 1.771 | 1.802 | 1.865 |
| Length | 14.600 | 17.220 | 17.220 | 17.220 |
| Running Tool | C1RT-01500-01 | C1RT-02000-01 | C1RT-02000-01 | C1RT-02000-01 |
| Pulling Tool | SBPT-01500-01 | SBPT-02000-01 | SBPT-02000-01 | SBPT-02000-01 |
| Pulling Prong | BBPO-01500-01 | BBPO-02000-01 | BBPO-02000-01 | BBPO-02000-01 |

| SPECIFICATIONS | | | | |
|----------------|---------------|---------------|---------------|---------------|
| | 2.250 | 2.310 | 2.750 | 2.810 |
| Fishneck | 1.750 | 1.750 | 2.313 | 2.313 |
| Maximum O.D. | 2.240 | 2.302 | 2.740 | 2.802 |
| Length | 17.759 | 17.759 | 18.906 | 18.906 |
| Running Tool | C1RT-02500-01 | C1RT-02500-01 | C1RT-03000-01 | C1RT-03000-01 |
| Pulling Tool | SBPT-02500-01 | SBPT-02500-01 | SBPT-03000-01 | SBPT-03000-01 |
| Pulling Prong | BBPO-02500-01 | BBPO-02500-01 | BBPO-03000-01 | BBPO-03000-01 |

All Specification Tables contain approximated dimensions and should be used for reference only.