




G STOP ANCHOR

ASSEMBLY DESCRIPTION

The B & T G Stop Anchor is used with the G Packoff to pack off holes in the tubing. A Bull Plug Nose is also available for the entire assembly.

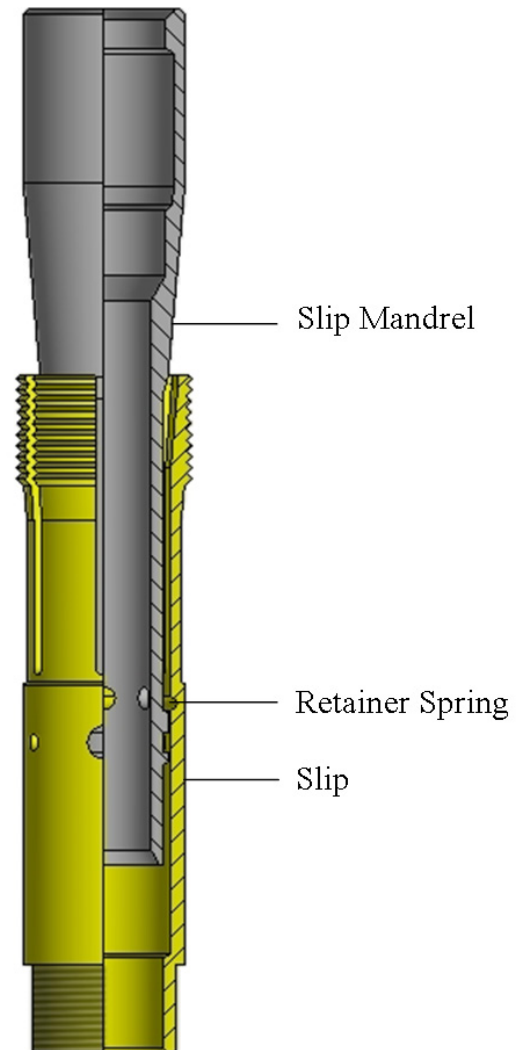



G STOP ANCHOR

SPECIFICATIONS			
	2.000	2.500	3.000
Fishneck	1.375	1.813	2.150
Maximum O.D.	1.820	2.266	2.720
Minimum I.D.	1.063	1.500	1.750
Connections	1-5/8"-12	2-1/16"-12	2-1/2"-12
Shear Pin	0.250	0.250	0.250

All Specification Tables contain approximated dimensions and should be used for reference only.