



JD PULLING TOOL


ASSEMBLY DESCRIPTION

The JD Pulling Tool is the jar down version of the J Pulling Tool series. It can accommodate different Cores to change the reach of the tool during operation.

*The C Core is the longest Core, but it has the shortest reach.

*The S Core has a medium length, and a medium reach.

*The L Core is a short Core with the longest reach.

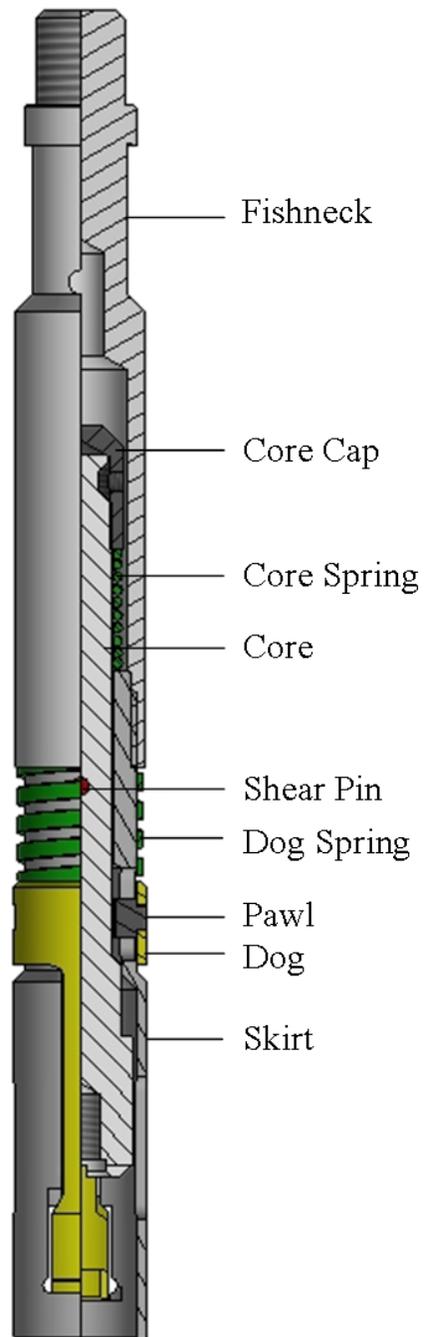



JD PULLING TOOL

SPECIFICATIONS				
	1.250	1.375	1.500	1.625
Fishneck	1.188	1.188	1.188	1.188
Maximum O.D.	1.290	1.375	1.422	1.625
Pin Connection	15/16"-10	15/16"-10	15/16"-10	15/16"-10
Bottom Connection	1/4"-20	1/4"-20	1/2"-13	1/2"-13
Shear Pin	3/16" X 1-9/64"	3/16" X 1-9/64"	3/16" X 1-11/64"	3/16" X 1-11/64"
Fishneck Engages	0.875	1.000	1.187	1.187
C Core Reach	1.906	1.813	1.093	1.031
S Core Reach	2.656	2.562	1.843	2.281
Length	12.906	13.000	13.063	13.000

SPECIFICATIONS				
	2.000	2.500	3.000	4.000
Fishneck	1.375	1.375	1.750	2.313
Maximum O.D.	1.859	2.250	2.796	3.750
Pin Connection	15/16"-10	15/16"-10	1-1/16"-10	1-1/16"-10
Bottom Connection	1/2"-13	1/2"-30	5/8"-11	1-1/4"-12
Shear Pin	5/16" X 1-31/64"	5/16" X 1-27/32"	3/8" X 2-11/32"	3/8" X 3-19/64"
Fishneck Engages	1.375	1.750	2.313	3.125
C Core Reach	1.437	1.265	1.643	2.313
S Core Reach	2.281	2.391	2.297	3.375
Length	14.391	14.765	15.000	19.093

All Specification Tables contain approximated dimensions and should be used for reference only.