



## JU PULLING TOOL


### ASSEMBLY DESCRIPTION

The JU Pulling Tool is the jar up version in the J Pulling Tool series. It can accommodate different Cores to change the reach of the tool during operation.

\*The C Core is the longest Core, but it has the shortest reach.

\*The S Core has a medium length, and a medium reach.

\*The L Core is a short Core with the longest reach.

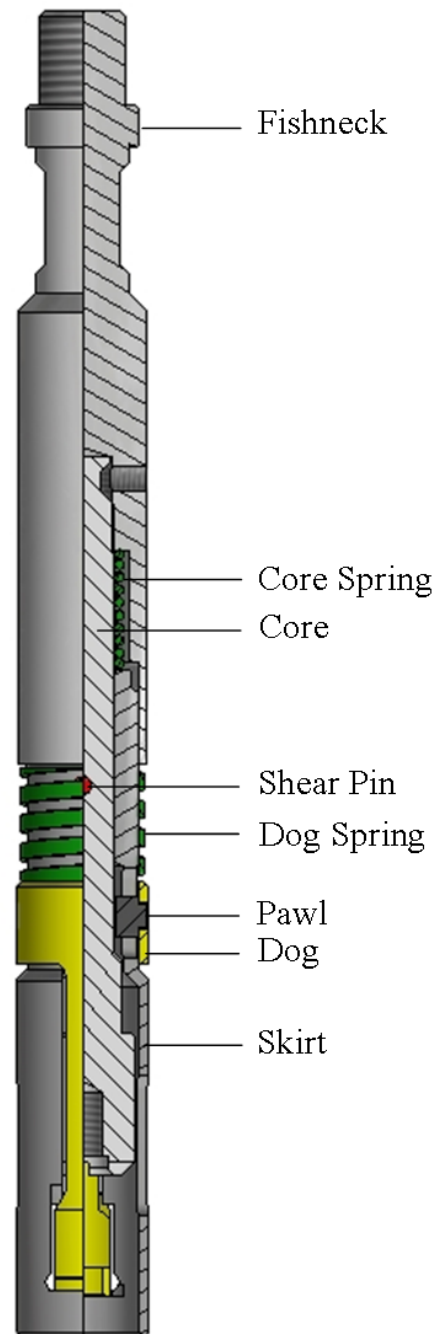



## JU PULLING TOOL

SPECIFICATIONS				
	1.250	1.375	1.500	1.625
Fishneck	1.188	1.188	1.188	1.188
Maximum O.D.	1.290	1.375	1.422	1.625
Pin Connection	15/16"-10	15/16"-110	15/16"-10	15/16"-10
Bottom Connection	1/4"-20	1/4"-20	1/2"-13	1/2"-13
Shear Pin	3/16" X 1-9/64"	3/16" X 1-9/64"	3/16" X 1-11/64"	3/16" X 1-11/64"
Fishneck Engages	0.875	1.000	1.187	1.187
C Core Reach	1.937	1.000	1.093	1.093
S Core Reach	2.688	2.625	1.843	1.843
Length	12.906	12.281	13.000	12.938

SPECIFICATIONS				
	2.000	2.500	3.000	4.000
Fishneck	1.375	1.375	1.750	2.313
Maximum O.D.	1.859"	2.250	2.797	3.750
Pin Connection	15/16"-10	15/16"-10	1-1/16"-10	1-1/16"-10
Bottom Connection	1/2"-13	1/2"-13	5/8"-11	1-1/4"-12
Shear Pin	5/16" X 1-31/64"	5/16" X 1-27/32"	3/8" X 2-21/64"	3/8" X 3-19/64"
Fishneck Engages	1.375	1.750	2.313	3.125
C Core Reach	1.437	1.312	1.437	3.375
S Core Reach	2.125	2.188	2.125	2.313
Length	14.328	14.750	14.750	19.062

All Specification Tables contain approximated dimensions and should be used for reference only.