




## M / F LOCK

### ASSEMBLY DESCRIPTION

The F Lock with packing gland is a top No-Go lock used in TF type profiles. The F Lock has a No-Go shoulder to prevent downward movement and collet type locking fingers to prevent upward movement.

The I.D. of the lock has relatively smooth, uninterrupted flow path and is excellent for high volume completions.

When the packing gland and packing unit assembly is made up, the item becomes an M Lock.

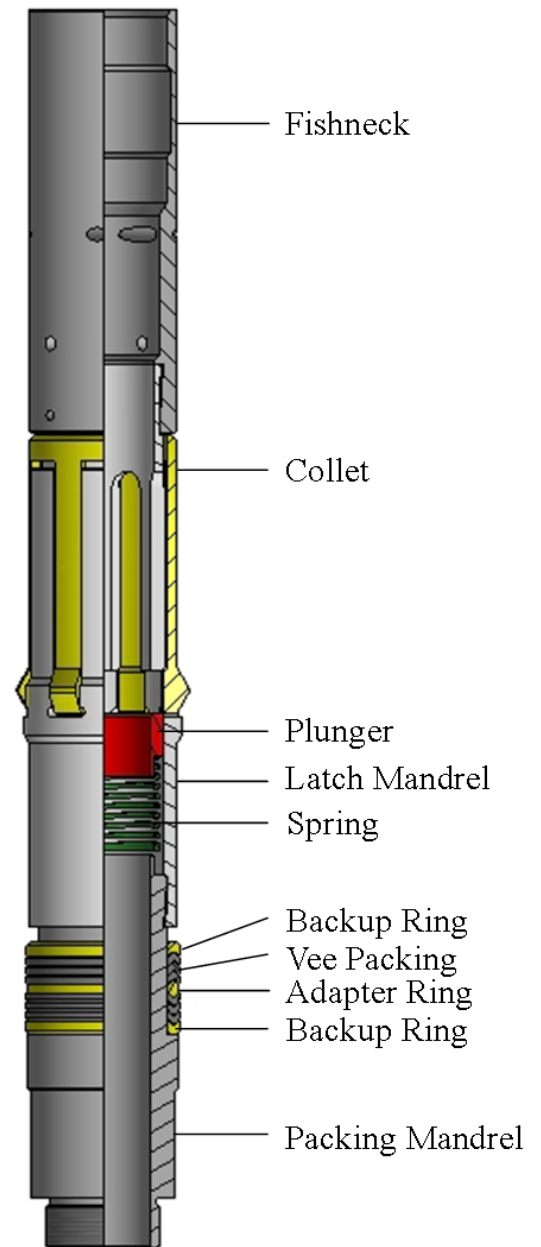



## M / F LOCK

SPECIFICATIONS				
	2.750	2.810	3.688	3.810
Fishneck	2.310	2.310	3.120	3.120
No-Go O.D.	2.802	2.872	3.737	3.835
Lock O.D.	2.715	2.715	3.625	3.625
Latch I.D.	1.850	1.850	2.750	2.750
Overall Length	23.125	23.125	23.125	23.125
Lock Ring I.D.	1.750	1.750	2.625	2.625
Packing I.D.	1.500	1.500	2.625	2.625

All Specification Tables contain approximated dimensions and should be used for reference only.