




## B & T PX PLUG

### ASSEMBLY DESCRIPTION

The B & T PX Plug is a positive plug used with a B & T X Lock. It can be used to test tubing or plug tubing for repairs or replacements. Pulling the Prong from the assembly achieves equalization.

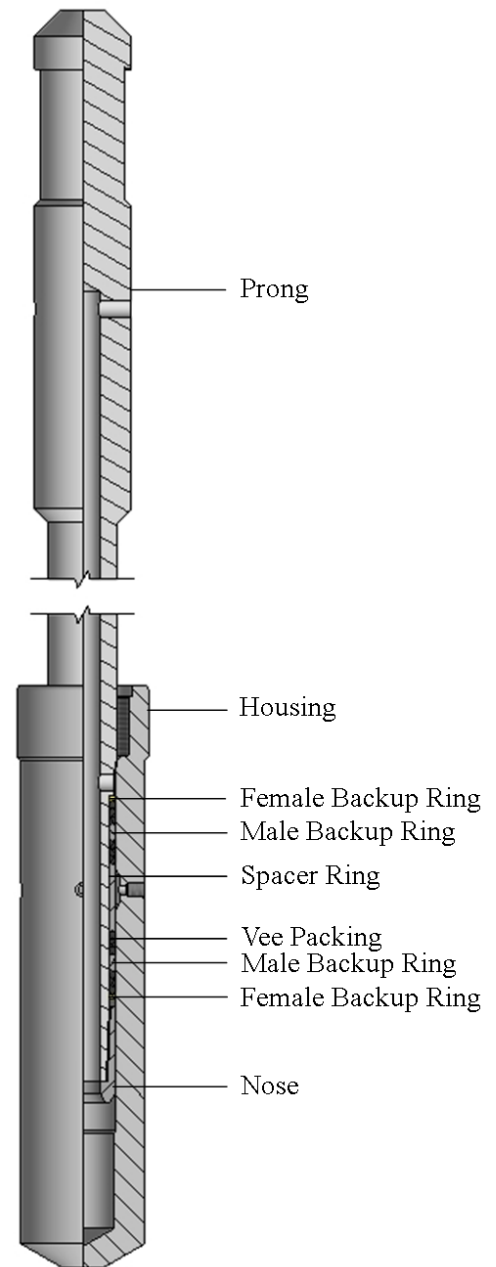



## B & T PX PLUG

SPECIFICATIONS				
	1.500	1.625	1.875	2.313
Fishneck	1.000	1.000	1.375	1.375
No-Go O.D.	1.490	1.615	1.865	2.300
Connections	1-1/8"-16	1-1/8"-16	1-3/8"-14	1-3/4"-12

SPECIFICATIONS				
	2.750	2.813	2.875	3.313
Fishneck	1.375	1.375	1.375	1.375
No-Go O.D.	2.740	2.800	2.870	3.307
Connections	2-1/4"-12 SLB	2-1/4"-12 SLB	2-1/4"-12 SLB	2-3/4"-12 SLB

SPECIFICATIONS				
	3.813	4.313	4.562	
Fishneck	2.313	3.125	3.125	
No-Go O.D.	3.805	4.307	4.556	
Connections	3-1/16"-12 SLB	3-1/4"-12 SLB	3-3/4"-12 SLB	

All Specification Tables contain approximated dimensions and should be used for reference only.