




B & T R-LINE RUNNING TOOL

ASSEMBLY DESCRIPTION

The B & T R-Line Running Tool is used to run, locate, and set subsurface devices in corresponding selective or No-Go Landing Nipples, such as the B & T R Landing Nipple or the B & T RN Landing Nipple.

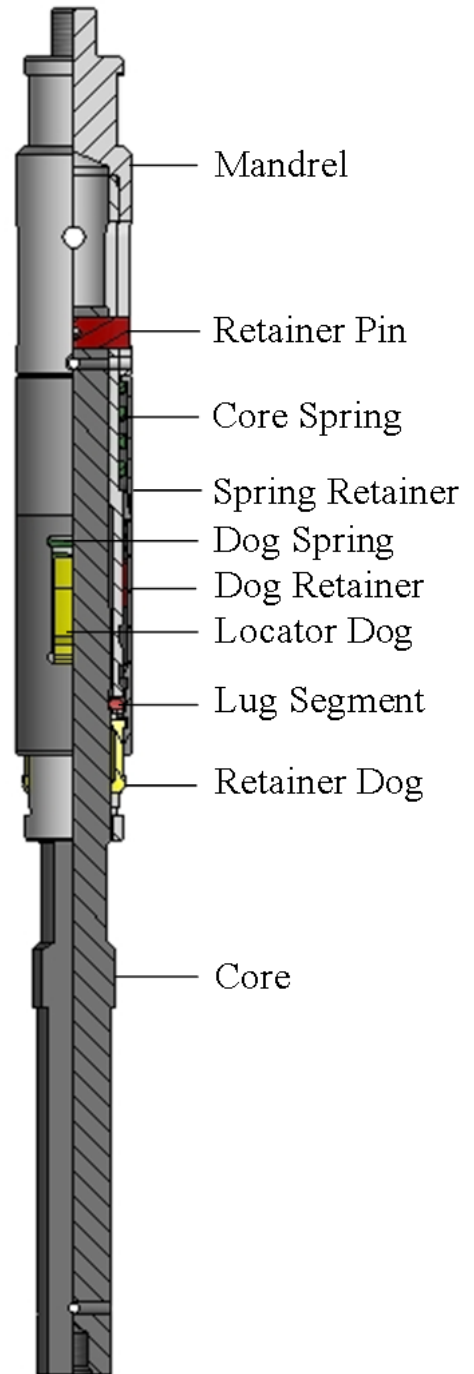



B & T R-LINE RUNNING TOOL

SPECIFICATIONS				
	1.710	1.781	1.875	2.000
Fishneck	1.188	1.375	1.375	1.375
Maximum O.D. (Dogs Retracted)	1.640	1.750	1.750	1.938
Maximum O.D. (Dogs Expanded)	1.760	1.828	1.937	2.063
Pin Connection	15/16"-10	15/16"-10	15/16"-10	15/16"-10
Bottom Connection	3/8"-16	1/2"-13	1/2"-13	1/2"-13
Length	30.063	29.313	29.313	29.313

SPECIFICATIONS				
	2.125	2.188	2.313	2.562
Fishneck	1.375	1.750	1.750	1.750
Maximum O.D. (Dogs Retracted)	2.063	2.175	2.175	2.500
Maximum O.D. (Dogs Expanded)	2.165	2.297	2.359	2.671
Pin Connection	15/16"-10	15/16"-10	15/16"-10	15/16"-10
Bottom Connection	1/2"-13	5/8"-11	5/8"-11	5/8"-11
Length	29.313	29.313	29.313	30.250

All Specification Tables contain approximated dimensions and should be used for reference only.



B & T R-LINE RUNNING TOOL

SPECIFICATIONS				
	2.750	2.813	2.875	3.313
Fishneck	2.313	2.313	2.313	2.313
Maximum O.D. (Dogs Retracted)	2.690	2.690	2.840	3.250
Pin Connection	1-1/16"-10	1-1/16"-10	1-1/16"-10	1-1/16"-10
Bottom Connection	3/4"-10	3/4"-10	3/4"-10	1-7/8"-12
Length	32.000	32.000	32.000	32.406

SPECIFICATIONS				
	3.437	3.688	3.813	4.000
Fishneck	2.313	2.313	2.313	2.313
Maximum O.D. (Dogs Retracted)	3.410	3.610	3.750	3.940
Pin Connection	1-1/16"-10	1-1/16"-10	1-1/16"-10	1-1/16"-10
Bottom Connection	1-7/8"-12	1-7/8"-12	1-7/8"-12	1-7/8"-12
Length	33.800	31.671	33.800	33.800

SPECIFICATIONS				
	4.125	4.313	4.562	4.750
Fishneck	2.313	2.313	3.125	3.125
Maximum O.D. (Dogs Retracted)	3.940	4.280	4.500	4.690
Pin Connection	1-1/16"-10	1-1/16"-10	1-1/16"-10	1-1/16"-10
Bottom Connection	2-1/8"-12	2-1/8"-12	2-3/16"-12	2-1/2"-10
Length	33.800	33.800	33.800	33.800

All Specification Tables contain approximated dimensions and should be used for reference only.