




RZG BLANKING PLUG

ASSEMBLY DESCRIPTION

The RZG Blanking Plug works in the same way as the FWG Blanking Plug however the RZG Blanking Plug does not feature a No-Go on the lock. Instead, the No-Go is located on the G Bottom.

The RZG Blanking Plug will be set and locked in the F Profile. Once it has been properly locked it will allow fluid to bypass through its side ports. This will allow pressure to be held in either direction. The RZG Blanking Plug can be equalized and pulled with standard wireline tools.

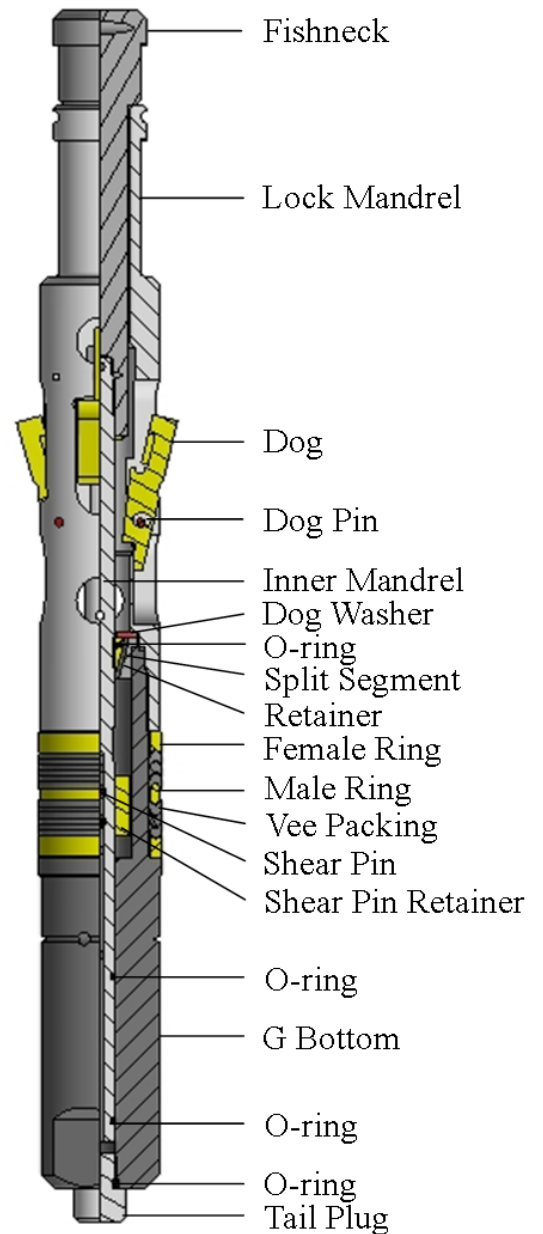



RZG BLANKING PLUG

SPECIFICATIONS				
	1.500	1.560	1.780	1.810
Fishneck	1.188	1.188	1.375	1.375
No-Go O.D.	1.490	1.552	1.771	1.802
Length	14.690	14.560	15.600	15.600

SPECIFICATIONS				
	1.870	2.250	2.310	2.750
Fishneck	1.375	1.750	1.750	2.313
No-Go O.D.	1.865	2.240	2.240	2.740
Length	15.600	16.600	16.600	16.690

SPECIFICATIONS				
	2.810	3.688	3.750	3.810
Fishneck	2.313	3.125	3.125	3.125
No-Go O.D.	2.802	3.678	3.740	3.802
Length	16.690	19.470	19.470	19.470

All Specification Tables contain approximated dimensions and should be used for reference only.