




SHOCK ABSORBER

ASSEMBLY DESCRIPTION

The Shock Absorber is used to protect sensitive recording equipment from various jarring actions. The Shock Absorber has two separate Springs which receive both upward and downward jarring shock. The lower Spring is much heavier as it will be holding the weight of the tool string.

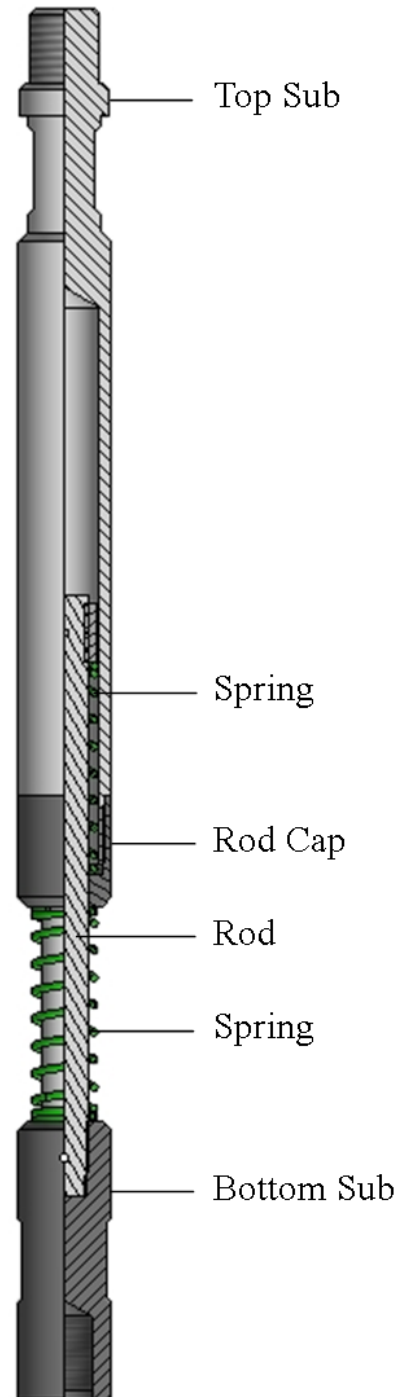



SHOCK ABSORBER

SPECIFICATIONS			
	0.750	1.000	1.250
Fishneck	0.750	0.875	1.188
Connection	5/8"-11	5/8"-11	15/16"-10

SPECIFICATIONS			
	1.500	1.750	1.875
Fishneck	1.375	1.750	1.750
Connection	15/16"-10	15/16"-10	1-1/16"-10

All Specification Tables contain approximated dimensions and should be used for reference only.