




# WHISKERED BOMB HANGER

## ASSEMBLY DESCRIPTION

The Whiskered Bomb Hanger can be used to set downhole pressure gauges. The lower Dogs are held in a retracted position by a spring. As the tool is lowered the spring follows the tubing wall until the tool exits the tubing. This then allows the spring to push the Dogs out and set the Whiskered Bomb Hanger.

Please specify casing size and weight requirements when ordering the Whiskered Bomb Hanger.

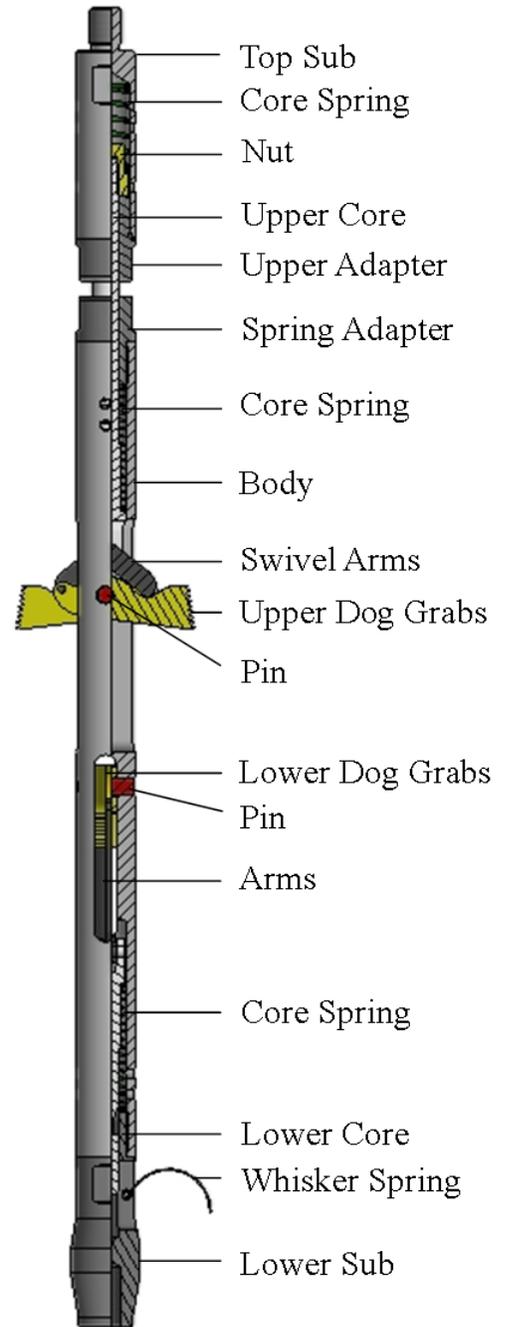



## WHISKERED BOMB HANGER

SPECIFICATIONS	
	Standard
Maximum O.D.	1.250
Connections	3/4"-16
Length	12.500

SPECIFICATIONS		
The Whiskered Bomb Hanger is available for the following Tubing Sizes		
4.500" 9.50#	5.000" 11.50#	5.500" 13.00#
4.500" 11.60#	5.000" 13.00#	5.500" 14.00#
4.500" 13.50#	5.000" 15.00#	5.500" 15.50#
4.500" 15.10#	5.000" 18.00#	5.500" 17.00#
		5.500" 20.00#
		5.500" 23.00#

All Specification Tables contain approximated dimensions and should be used for reference only.