




B & T X / XN LOCK

ASSEMBLY DESCRIPTION

The B & T X Lock is a selective lock that can be installed in X Landing Nipples. It is used in standard weight tubing. This lock uses Keys to engage a profile in the Landing Nipple and an integrated Packing Mandrel that allows it to hold pressure from either above or below. This lock can be used in conjunction with pump thru plugs, positive plugs, safety valves, and standing valves.

The B & T XN Lock is the No-Go version of the B & T X Lock. The Keys have an angled shoulder, designed to fit into the bore restriction of the XN Landing Nipple.

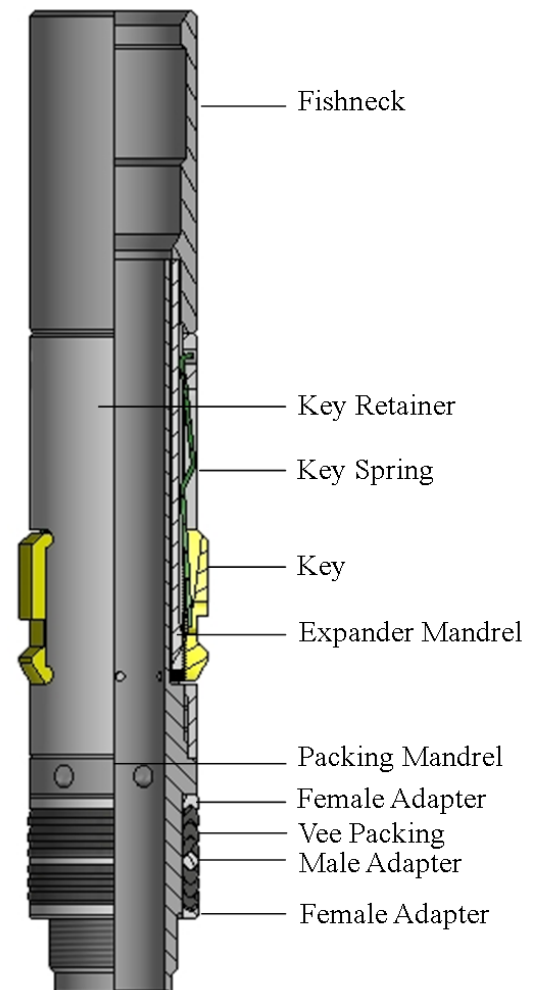



B & T X / XN LOCK

SPECIFICATIONS				
	1.250	1.500	1.625	1.875
Fishneck	0.875	1.625	1.625	1.375
Minimum I.D.	0.620	0.750	0.750	1.000
Connections	7/8"-20	1-1/8"-16	1-1/8"-16	1-3/8"-16
Running Tool	XLRT-01250-01	XLRT-01500-01	XLRT-01625-01	XLRT-01875-01
Pulling Tool	GSPT-01250-01	GSPT-01500-01	GSPT-01500-01	GSPT-02000-01

SPECIFICATIONS				
	2.313	2.750	2.813	3.313
Fishneck	1.813	2.313	2.313	2.625
Minimum I.D.	1.375	1.750	1.750	2.125
Connections	1-3/4"-12	2-1/4"-12 SLB	2-1/4"-12	2-3/4"-12 SLB
Running Tool	XLRT-02313-01	XLRT-02750-01	XLRT-02813-01	XLRT-03313-18
Pulling Tool	GSPT-02500-01	GSPT-03000-01	GSPT-03000-01	GSPT-03500-18

SPECIFICATIONS				
	3.813	4.313	4.562	
Fishneck	3.125	3.125	4.000	
Minimum I.D.	2.625	2.625	3.125	
Connections	3-1/16"-12 SLB	3-1/4"-12 SLB	4"-12 SLB	
Running Tool	XLRT-03813-18	XLRT-04313-18	XLRT-04562-18	
Pulling Tool	GSPT-04000-18	GSPT-04000-18	GSPT-05000-18	

All Specification Tables contain approximated dimensions and should be used for reference only.