




Z LOCK

ASSEMBLY DESCRIPTION

The B & T Z Lock is used with B & T R Landing Nipples. The B & T Z Lock has upward facing Dogs to prevent upward movement. The No-Go shoulder is located on the downhole accessory and No-Go's in the bottom No-Go of the B & T R Landing Nipple prevent downward movement.

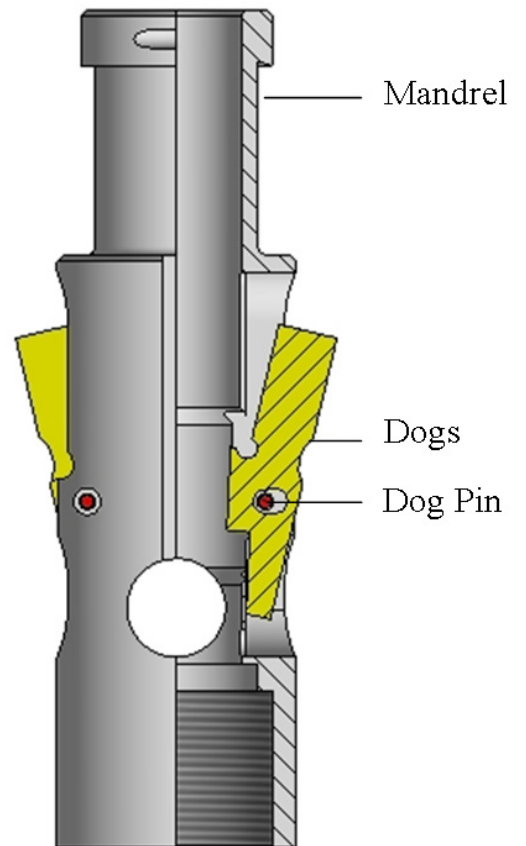



Z LOCK

SPECIFICATIONS				
	1.780	1.810	1.875	2.250
Fishneck	1.375	1.375	1.375	1.750
Maximum O.D.	1.750	1.750	1.750	2.188
Length	7.500	7.500	7.500	7.690
Running Tool	C1RT-02000-01	C1RT-02000-01	C1RT-02000-01	C1RT-02500-01
Pulling Tool	SBPT-02000-01	SBPT-02000-01	SBPT-02000-01	SBPT-02500-01

SPECIFICATIONS				
	2.310	2.750	2.810	3.680
Fishneck	1.750	2.313	2.313	3.125
Maximum O.D.	2.188	2.688	2.688	3.562
Length	7.690	8.250	8.250	9.930
Running Tool	C1RT-02500-01	C1RT-03000-01	C1RT-03000-01	C1RT-04000-01
Pulling Tool	SBPT-02500-01	SBPT-03000-01	SBPT-03000-01	SBPT-04000-01

SPECIFICATIONS				
	3.750	3.810		
Fishneck	3.125	3.125		
Maximum O.D.	3.562	3.562		
Length	9.930	9.930		
Running Tool	C1RT-04000-01	C1RT-04000-01		
Pulling Tool	SBPT-04000-01	SBPT-04000-01		

All Specification Tables contain approximated dimensions and should be used for reference only.